

Weatherproof Cover IP55



- Transparent, impact resistant cover
- No Spring required at hinge
- Soft pad to fill voids on uneven surface



Technical Specifications

- IEC 60529, IEC 60670
- IP55 in used and unused situations
- Transparent, impact resistant cover
- No spring required
- Soft pad to fill voids on uneven surface
- Self holding cordgrip
- Card sloped to avoid water entering
- No gasket is required
- Can be padlocked
- Easy to add-on to existing socket outlet

Ordering Details

Description	Type Code
Weatherproof Cover with Soft Pad	CWP100

Other range

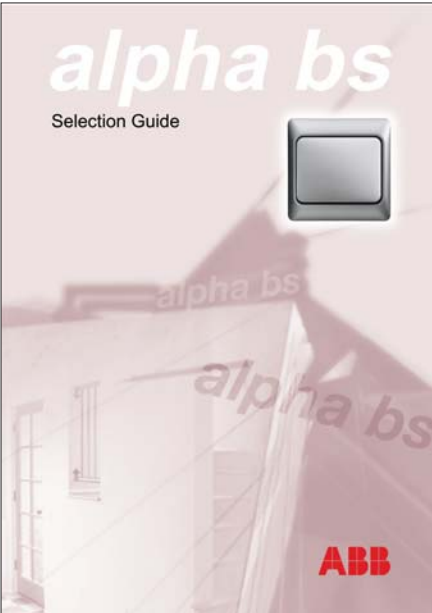


ABB Industry Pte Ltd
2 Ayer Rajah Crescent, Singapore 139935
Tel: +65 6776 5711 Fax: +65 6778 0222
www.abb.com/sg

Weatherproof Switches and Socket Outlets



Weatherproof Switched Isolator
IP66




Technical Specification	
Standard Specifications	IEC 60947-3 & BS EN 60947-3
Number of poles	2P & 4P
Rated operational current I _e	20A, 32A, 45A & 63A
Rated operational voltage U _e	240/440V
Rated insulation voltage U _i	630V
Rated impulse withstand voltage U _{imp}	2.5kV 1.2/50μs
Rated frequency	50/60Hz
Rated utilization category	AC-23A
Rated making capacity	10I _e
Rated breaking capacity	8I _e
Rated short-time withstand current I _{cw}	15I _e for 1s
Rated short-circuit making capacity I _{cm}	4500A
Pollution degree	3
Degree of protection	IP66

Ordering Details

Type Code	Description
WSD220	20A 2P Switched Isolator
WSD232	32A 2P Switched Isolator
WSD245	45A 2P Switched Isolator
WSD263	63A 2P Switched Isolator
WSD420	20A 4P Switched Isolator
WSD432	32A 4P Switched Isolator
WSD445	45A 4P Switched Isolator
WSD463	63A 4P Switched Isolator

Dimensions

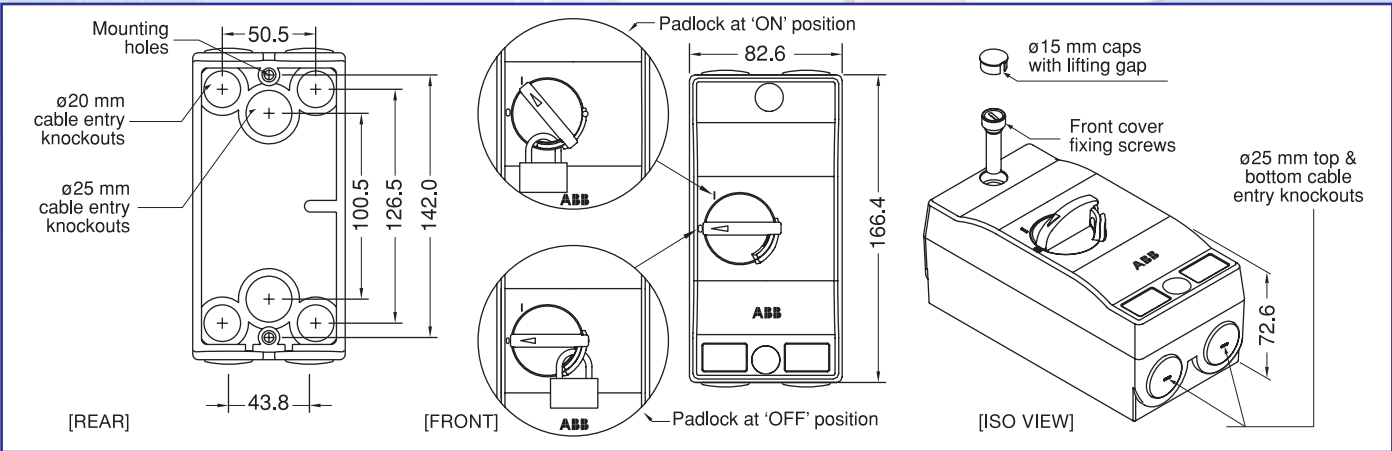

Weatherproof Unswitched
and Switched Socket Outlet
IP55




Technical Specifications	Unswitched Socket Outlet	Switched Socket Outlet
Standard specifications	BS 1363-2 , IEC 60529	BS EN 60947- 3 , IEC 60947-3
Rated voltage	250V AC , 50Hz	
Rated current	suitable for 13A	
Degree of protection	IP 55 in used and unused situations	
Padlock	No	Yes, in off position
	max. 2.5mm² in coming cable	
Installation and connection	conduit entry through 1 x m25 thread entries on top and bottom m20 is possible through reducer provided	

Ordering Details

Description	Type Code
Weatherproof 13A Unswitched Socket Outlet	WSO123
Weatherproof 13A Switched Socket Outlet	WSO213

Dimensions

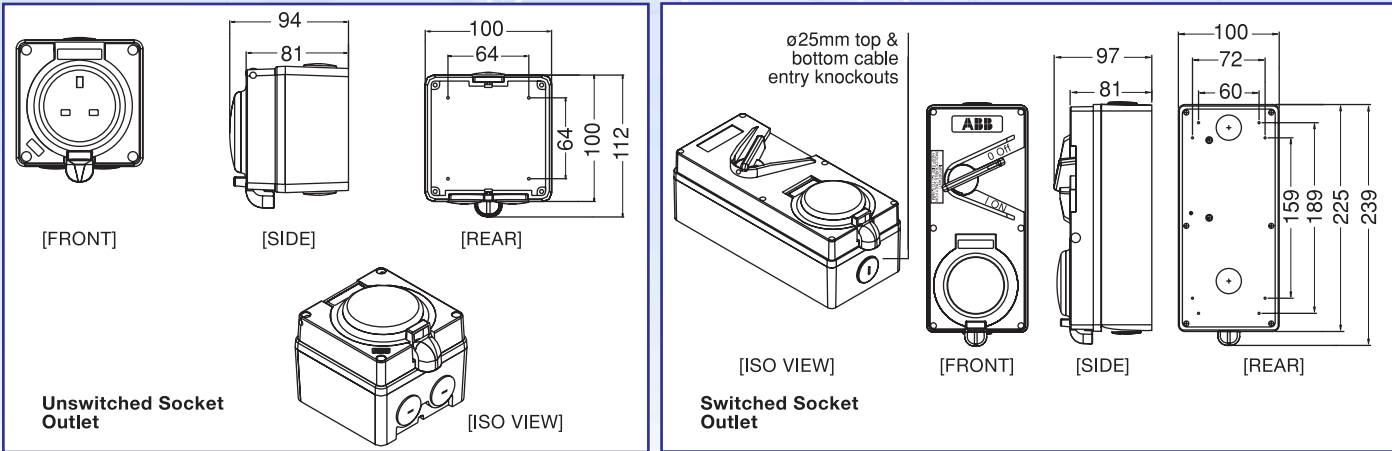

Weatherproof Switch
IP66



Technical Specification	
Standard Specifications	IEC 60669
Rated voltage	250V AC , 50Hz
Rated current	10AX & 20AX
Degree of protection	IP66
Padlock	At " ON " & " OFF " position
Installation and connection	Conduit entry through M25 thread entries on top and bottom

Ordering Details

Type Code	Description
WSW101	10AX 1 Gang 1 Way Switch
WSW102	10AX 1 Gang 2 Way Switch
WSW114	20AX 1 Gang DP Switch

Dimensions

